High-gloss double-sided hanging specification sheet

32- inch high-brightness wall-mounted all-in-one TV

Model: WD 32 0T- 3

Version	describe	date
V1.0	create	2023-8-7
V 2 .0	Revise	2026-01-01

Head record

I. Overview 3

II. Technical Parameters 4

III. External Dimensions 5

IV. Function Introduction: 6

I. Overview

□□Technical parameters

model		WD 32 0T- 3 (OD10 optional with wire rope hanger or telescopic pole)
Appearance	Exterior color	Gray is available / Custom colors are available for orders of 10 units or more.
	Body size	771*425.6*57 (L*W*T)
	Body material	Sheet metal
	Installation method	Hanging
Package	Packaging size	96 0 *25 0 *68 0 MM
	Total weight	29 kg
show	size	32 ″ TFT LED
	Display area/proportio	698.6 mm x 392.9 mm

	n	
	Maximum resolution	1920 × 1080
	brightness	700 cd/ m2 2500 cd/ m2 (High-gloss finish available from 1000-3000)
	Contrast	13 00:1
	Viewing angle	(Top/Bottom/Left/Right): 89°/89°/89°/89°
	Response time	6ms
	color	16.7M colors
Power supply and power consumption		1 0 0 V ~ 2 4 0 V AC , ≤ 180 W
motherboard	interface	RK 3288, CPU quad- core 1.8GHz, GPU quad-core Mali-T764 2GB DDR3 RAM, 16GB storage (expandable) 2 external USB ports 4 built-in USB ports 1 SD 1 RJ45 network port One LVDS port and one HDMI 2.0 port support 4K@60Hz output (customization required). Supports Wi-Fi/Bluetooth/Expandable 3G/4G
Function	operating system	Android 5.1.1
	Menu language	Menus in multiple languages including Chinese , English, Russian, American, French, Spanish, etc.
	Supported video formats	Support RM/RMVB, MKV, TS, FLV, AVI, VOB, MOV, WMV,
	Audio Supported Formats	MPEG-1 Layers I□II□III2.0, MPEG-4 AAC-LC 5.1/HE-AAC 5.1 / B S A C 2.0 , WAV , 2 4 -b i t li n e a r PCM 7.1
	Image supported formats	B MP , J P E G , P N G , G I F
	Other supported formats	PDF , PPT , SWF , text , real - time data stream
	Screen split	Video section , image and text section, scrolling text section, logo section, date section, time section. Weekday section, weather forecast section, live image section, live video section ...
	System upgrade mode	SD card update

	System Management Mode	Unified management , group management , multi- user management , remote management , scheduled power on/ off
	Remote operation mode	Remote automatic power on/ off , remote program updates and editing , remote status monitoring
	System playback mode	Supports multiple playback modes such as loop , timed playback , and interstitial playback.
	System Architecture	Adopting an advanced B / S (Browser / Server) management architecture
	Support network	Local area network (LAN), wide area network (WAN) , Wi - Fi , 3G
	Built-in speaker	Built-in mini dual speakers
other	reliability	5,000,000 h
	Operating temperature	-10 ℃ ~ 50 ℃
	Storage temperature	-20 ℃ ~ 60 ℃
	Operating humidity	5 % ~ 90 %
	Storage humidity	5 % ~ 90 %
	Safety indicators	Supports hardware dongle, login password, control password, and hierarchical user permission settings.
	Quality Standards	China's Compulsory Certification for Electrical Products (3C)
	Environmental standards	All components and packaging materials comply with international environmental standards.

□□External dimensions

WD320T-3(膨胀挂钩)

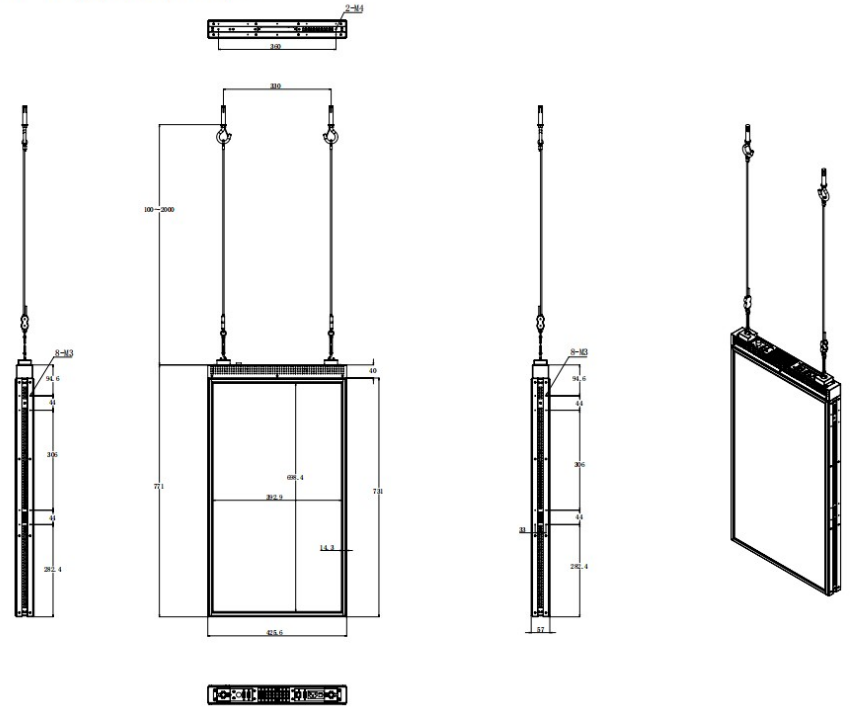

WD320T-3(吊挂伸缩杆)

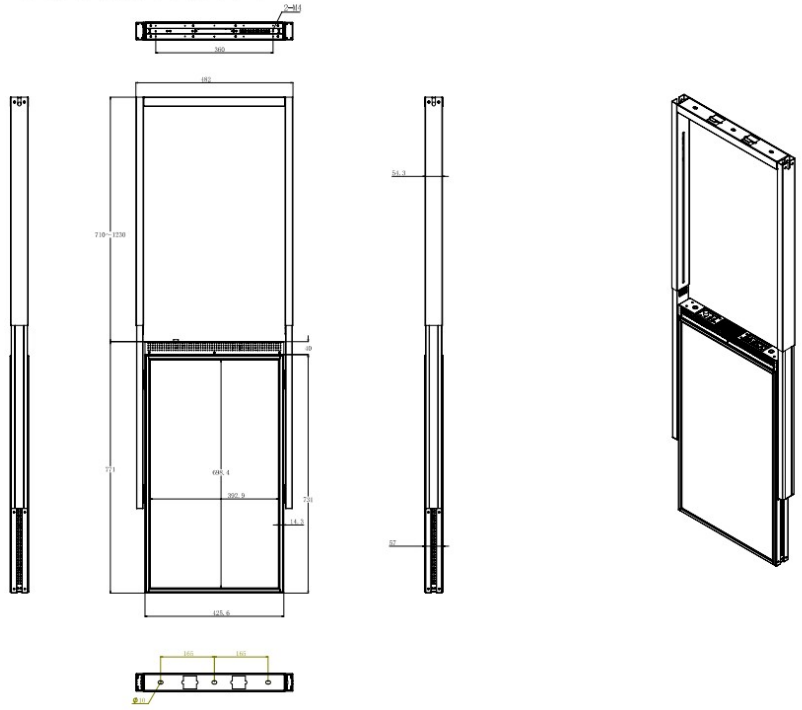

□□Packaging, honeycomb box